



Daylight Fresnel 18kW/12kW DE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø625mm (24-5/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast,
Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 18kW/12kW DE

SPECIFICATIONS

Identity No.	L18012DD
Capacity	18,000W / 12,000W
Lamp Bulb Voltage	225V / 160V
Fresnel Lens	Ø625mm (24-5/8 in.)
Lamp Type	HMI 18000W/DE or HMI 12000W/DE
Color Temp.	5600K
Lamp Holder	Double-End Spring loaded
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	230 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15 m
Min. Distance to Flammable Object	2 m
Operating Range	+30° ~ 0° ~ -30°
Weight (lamphead)	81.0 kg
Weight (with barndoor)	87.8 kg

ACCESSORIES

Electronic Ballast V3 : 18kW/12kW

Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø737mm (29 in.) :



Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

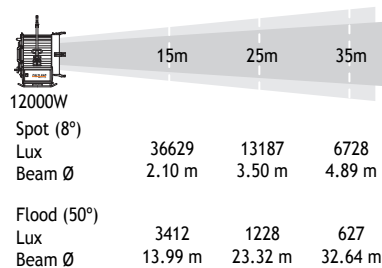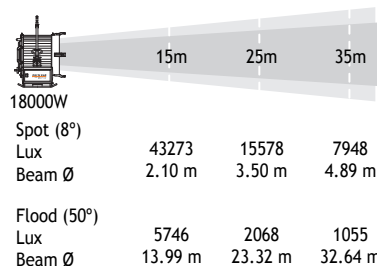

DIMENSIONS (mm)

