



Daylight Fresnel 6000W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø450mm (17-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 6000W SE


SPECIFICATIONS

Identity No.	L06000DS
Capacity	6,000W
Lamp Bulb Voltage	125V
Fresnel Lens	Ø450mm (17-3/4 in.)
Lamp Type	MSR 6000HR or HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	12 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	37.6 kg
Weight (with barndoor)	42.6 kg

ACCESSORIES

- Electronic Ballast V3 : 12kW/6kW or 6000W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrimms Ø533mm (21 in.) :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

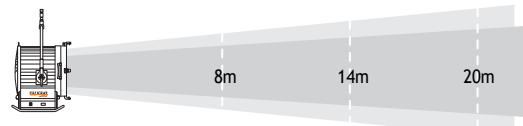

6000W

	8m	14m	20m
Spot (6°)			
Lux	59653	19479	9545
Beam Ø	0.84 m	1.47 m	2.10 m
Flood (65°)			
Lux	4498	1469	720
Beam Ø	10.19 m	17.84 m	25.48 m

DIMENSIONS (mm)

