



Daylight Fresnel 4000W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 4000W SE


SPECIFICATIONS

| | |
|-------------------------------------|----------------------------|
| Identity No. | L04000DS |
| Capacity | 4,000W |
| Lamp Bulb Voltage | 200V |
| Fresnel Lens | Ø300mm (11-3/4 in.) |
| Lamp Type | MSR 4000HR or HMI 4000W/SE |
| Color Temp. | 5600K |
| Lamp Holder | G38 |
| Stirrup | Ø28mm (1-1/8 in.) Spigot |
| Class / IP Rating | 1 / IP 23 |
| Max. Surface Temp. | 170 °C |
| Max. Ambient Temp. | 45 °C |
| Min. Distance to Illuminated Object | 10 m |
| Min. Distance to Flammable Object | 1.2 m |
| Operating Range | +45° ~ 0° ~ -45° |
| Weight (lamphead) | 21.8 kg |
| Weight (with barndoor) | 24.3 kg |

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø394mm (15-1/2 in.) :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

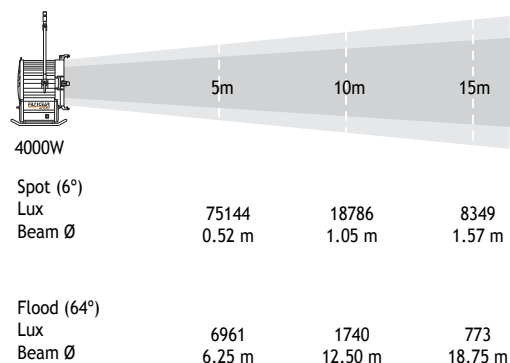

DIMENSIONS (mm)

