



Daylight Fresnel 4kW/2.5kW SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 4kW/2.5kW SE



SPECIFICATIONS

Identity No.	L04025DS
Capacity	4,000W / 2,500W
Lamp Bulb Voltage	200V / 115V
Fresnel Lens	Ø300mm (11-3/4 in.)
Lamp Type	MSR 4000HR or HMI 4000W/SE MSR 2500/HR or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C / 150 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m / 8 m
Min. Distance to Flammable Object	1.2 m / 1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	22.6 kg
Weight (with barndoor)	25.1 kg

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø394mm (15-1/2 in.) :
Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

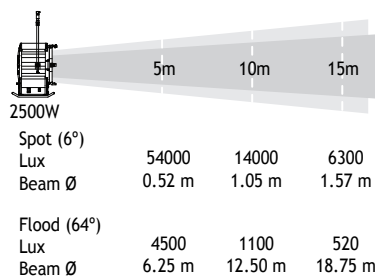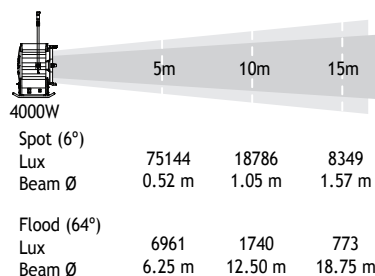

DIMENSIONS (mm)

