



Daylight Fresnel 2500W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø250mm (10 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 2500W SE


SPECIFICATIONS

Identity No.	L02500DS
Capacity	2,500W
Lamp Bulb Voltage	115V
Fresnel Lens	Ø250mm (9-7/8 in.)
Lamp Type	MSR 2500HR or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	8 m
Min. Distance to Flammable Object	1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	17.1 kg
Weight (with barndoor)	18.8 kg

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW or 2500W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø330mm (13 in.) :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

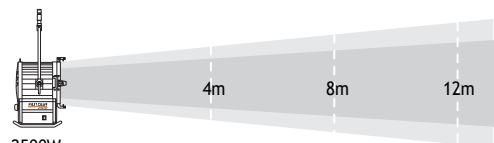

2500W			
Spot (7°)			
Lux	106366	26591	11818
Beam Ø	0.49 m	0.98 m	1.47 m
Flood (60°)			
Lux	8099	2025	900
Beam Ø	4.62 m	9.24 m	13.86 m

DIMENSIONS (mm)

