



Daylight Fresnel 1200W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm (6-7/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 1200W SE

SPECIFICATIONS

Identity No.	L01200DS
Capacity	1,200W
Lamp Bulb Voltage	100V
Fresnel Lens	Ø175mm (6-7/8 in.)
Lamp Type	MSR 1200HR or HMI 1200W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	180 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	6 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	9.7 kg
Weight (with barndoor)	10.7 kg

ACCESSORIES

Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø229mm (9 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

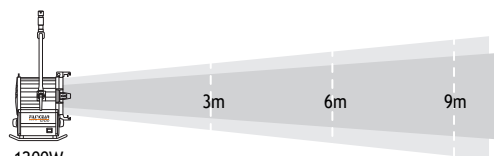

1200W			
Spot (5°)			
Lux	102403	25601	11378
Beam Ø	0.26 m	0.52 m	0.79 m
Flood (52°)			
Lux	7799	1950	867
Beam Ø	2.93 m	5.85 m	8.78 m

DIMENSIONS (mm)

