



## Daylight Fresnel 200W SE

### LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø112mm (4-3/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Fresnel 200W SE

### SPECIFICATIONS

Identity No.	L00200DS
Capacity	200W
Lamp Bulb Voltage	70V
Fresnel Lens	Ø112mm (4-3/8 in.)
Lamp Type	HMI 200W/SE
Color Temp.	5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	3.6 kg
Weight (with barndoor)	4.1 kg

### ACCESSORIES

Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC or 200W or 200W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

DC Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø168mm (6-5/8 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

### PHOTOMETRIC DATA

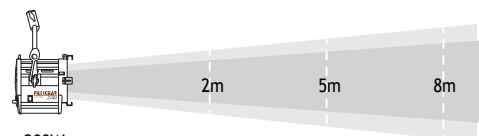

200W			
Spot (7°)			
Lux	24770	3963	1548
Beam Ø	0.24 m	0.61 m	0.98 m
Flood (52°)			
Lux	2929	469	183
Beam Ø	1.95 m	4.88 m	7.80 m

### DIMENSIONS (mm)

