

Daylight Par Faceted F12k

FACETED



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast,
Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F12k


SPECIFICATIONS

Identity No.	L12000FP
Capacity	12,000W
Lamp Bulb Voltage	160V
UV Protective Lens	Ø500mm
Lamp Type	HMI 12000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15 m
Min. Distance to Flammable Object	2 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	38.0 kg
Weight (with barndoor)	43.0 kg

ACCESSORIES

- Electronic Ballast V3 : 18kW/12kW, 12kW/6kW
- Lamphead to Ballast Cable : 10m (33 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø568mm (22-3/8 in.) :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

PHOTOMETRIC DATA

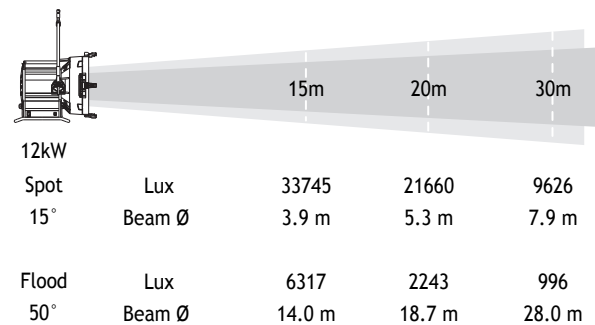

DIMENSIONS (mm)

