

# Daylight Par Faceted F6k

FACETED



### LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø420mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Par Faceted F6k

### SPECIFICATIONS

Identity No.	L06000FP
Capacity	6,000W
Lamp Bulb Voltage	125V
UV Protective Lens	Ø420mm
Lamp Type	HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	12 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	32.0 kg
Weight (with barndoor)	36.0 kg

### ACCESSORIES

Electronic Ballast V3 : 9kW/6kW, 6000W

Lamphead to Ballast Cable : 10m (33 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø495mm (19-1/2 in.) :

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

Spill Ring

### PHOTOMETRIC DATA

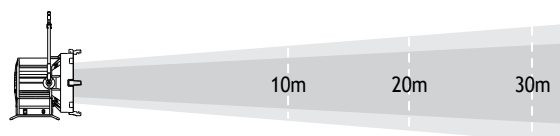

6kW				
Spot	Lux	31069	8630	3835
15°	Beam Ø	2.6 m	5.2 m	7.9 m
Flood	Lux	5183	1926	576
54°	Beam Ø	10.19 m	20.38 m	30.57 m

### DIMENSIONS (mm)

