



Daylight Par 400W Mini

SPECIFICATIONS

Identity No.	L00400DM
Capacity	400W
Lamp Bulb Voltage	70V
Protective Lens	Ø130mm (5-1/8 in.)
Par Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 400W SE
Color Temp.	5600K
Lamp Holder	GZZ9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° - 0° - -45°
Weight (lamphead)	3.0 kg
Weight (with barndoor)	3.3 kg

Daylight Par 400W Mini

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Protective Lens
- Set of 5 Par Lenses with Lens Case
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

ACCESSORIES

Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

DC Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case :

Spot, Medium Flood, Wide Flood,

Super Wide Flood, Frosted Super Flood

Set of 4 Scrims Ø168mm (6-5/8 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

DIMENSIONS (mm)

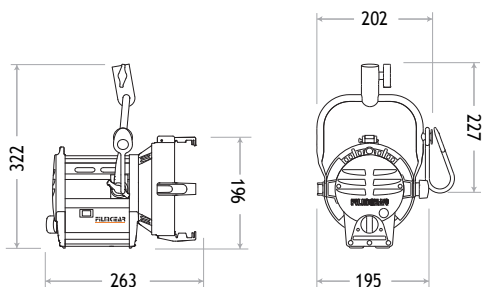

PHOTOMETRIC DATA

		3m	5m	7m
400W Spot (9°)	Lux	50182	18059	9214
	Beam Ø	0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux	20368	7333	3741
	Beam Ø	0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 42°)	Lux	5710	2056	1049
	Beam Ø	1.06 x 2.30 m	1.76 x 3.84 m	2.47 x 5.37 m
Super Wide Flood (40°)	Lux	4363	1571	802
	Beam Ø	2.18 m	3.64 m	5.10 m
rosted Super Flood (34°)	Lux	3199	1151	587
	Beam Ø	1.83 m	3.06 m	4.28 m