



Daylight Par 200W

SPECIFICATIONS

Identity No.	L00200DP
Capacity	200W
Lamp Bulb Voltage	70V
Protective Lens	Ø130mm (5-1/8 in.)
Par Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 200W SE
Color Temp.	5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° - 0° - -45°
Weight (lamphead)	3.2 kg
Weight (with barndoor)	3.7 kg

Daylight Par 200W

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Protective Lens
- Set of 5 Par Lenses with Lens Case
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

ACCESSORIES

Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC or 200W or 200W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.) DC Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Lens Case :

Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood

Set of 4 Scrims Ø168mm (6-5/8 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

DIMENSIONS (mm)

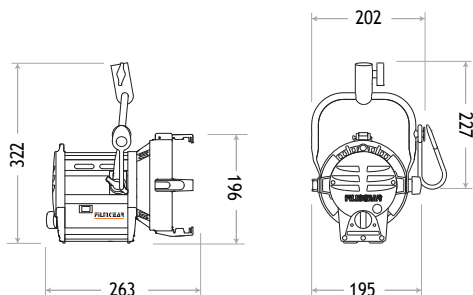

PHOTOMETRIC DATA

		2m	4m	6m
200W Spot (9°)	Lux	68175	17044	7575
	Beam Ø	0.31 m	0.63 m	0.94 m
Medium Flood (10° x 20°)	Lux	29315	7329	3257
	Beam Ø	0.35 x 0.71 m	0.70 x 1.41 m	1.05 x 2.12 m
Wide Flood (20° x 40°)	Lux	11953	2988	1328
	Beam Ø	0.71 x 1.46 m	1.41 x 2.91 m	2.12 x 4.37 m
Super Wide Flood (40°)	Lux	6363	1591	707
	Beam Ø	1.46 m	2.91 m	4.37 m
Frosted Super Flood (32°)	Lux	5090	1273	566
	Beam Ø	1.15 m	2.29 m	3.44 m