



Daylight Par 200W Mini

SPECIFICATIONS

Identity No.	L00200DM
Capacity	200W
Lamp Bulb Voltage	70V
Protective Lens	Ø112mm (4-3/8 in.)
Par Lens	Ø112mm (4-3/8 in.)
Lamp Type	HMI 200W SE
Color Temp.	5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° - 0° - -45°
Weight (lamphead)	1.4 kg
Weight (with barndoor)	1.7 kg

Daylight Par 200W Mini

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø112mm (4-3/8 in.) Protective Lens
- Set of 5 Par Lenses with Lens Case
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

ACCESSORIES

Electronic Ballast V3 : 400W/200W or 400W/200W AC/DC or 200W or 200W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.) DC Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø112mm (4-3/8 in.) with Lens Case :

Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood

Set of 4 Scrims Ø127mm (5 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

DIMENSIONS (mm)

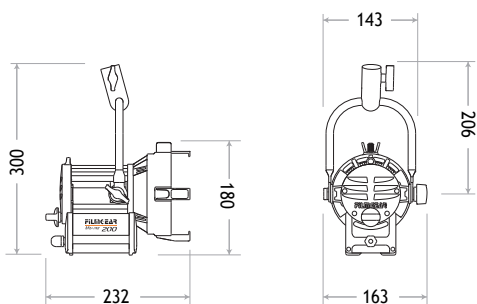

PHOTOMETRIC DATA

		2m	4m	6m
200W Spot (9°)	Lux	41587	10397	4621
	Beam Ø	0.31 m	0.63 m	0.94 m
Medium Flood (10° x 19°)	Lux	17882	4471	1987
	Beam Ø	0.35 x 0.67 m	0.70 x 1.34 m	1.05 x 2.01 m
Wide Flood (20° x 38°)	Lux	7291	1823	810
	Beam Ø	0.71 x 1.38 m	1.41 x 2.75 m	2.12 x 4.13 m
Super Wide Flood (36°)	Lux	3881	970	431
	Beam Ø	1.30 m	2.60 m	3.90 m
Frosted Super Flood (30°)	Lux	3105	776	345
	Beam Ø	1.07 m	2.14 m	3.22 m