




LED SPOT 300 (Bi-Color 2700K-6000K)


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø200mm Fresnel Lens
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable


DIMENSIONS (mm)

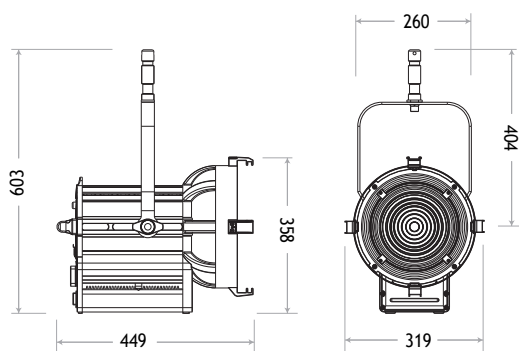

SPECTRUM

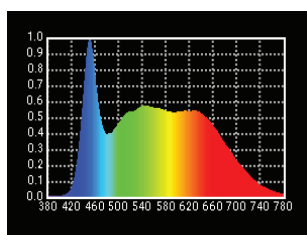


Daylight

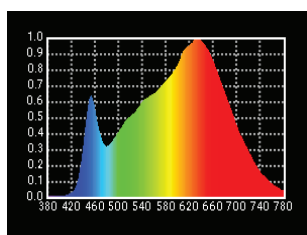

Tungsten

PHOTOMETRIC DATA




Daylight

Spot	Lux	8262	2974	1518	918
12°	Beam Ø	0.63m	1.05m	1.47m	1.89m
Flood	Lux	1796	647	330	200
52°	Beam Ø	2.93m	4.88m	6.83m	8.78m


Tungsten

Spot	Lux	6032	2171	1108	670
12°	Beam Ø	0.63m	1.05m	1.47m	1.89m
Flood	Lux	1300	468	239	144
52°	Beam Ø	2.93m	4.88m	6.83m	8.78m

HISTOGRAM

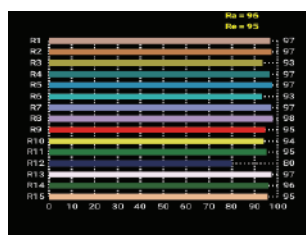

Daylight

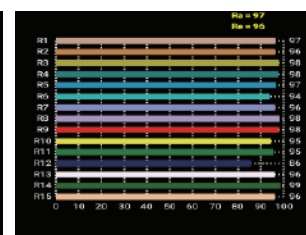

Tungsten

LED Spot 300 Bi-Color

SPECIFICATIONS

Identity No.	L0030BLS
Max. Capacity	300W
Voltage	95 - 260V AC
Frequency	50Hz / 60Hz
Current	3.2A - 1.2A
Fresnel Lens	Ø200mm
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Min. Distance to Illuminated Object	1 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	9.0 kg

ACCESSORIES

- Filter Frame
- Safety Cable (for lamphead)