




LED SPOT 150 (Bi-Color 2700K-6000K)


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm Fresnel Lens
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable


DIMENSIONS (mm)

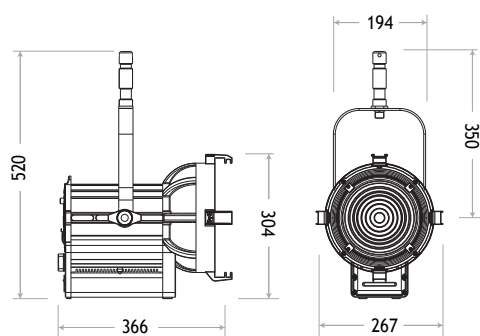

SPECTRUM

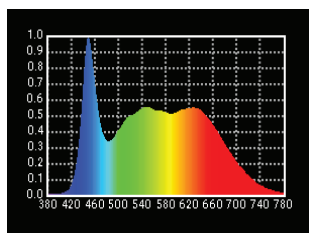


Daylight

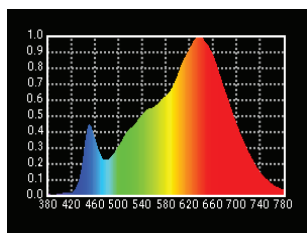


Tungsten

PHOTOMETRIC DATA




		3m	5m	7m	9m
Daylight					
Spot	Lux	6352	2287	1167	706
12°	Beam Ø	0.63m	1.05m	1.47m	1.89m
Flood	Lux	1282	462	236	143
52°	Beam Ø	2.93m	4.88m	6.83m	8.78m
Tungsten					
Spot	Lux	4442	1599	816	494
12°	Beam Ø	0.63m	1.05m	1.47m	1.89m
Flood	Lux	897	323	165	100
52°	Beam Ø	2.93m	4.88m	6.83m	8.78m

HISTOGRAM

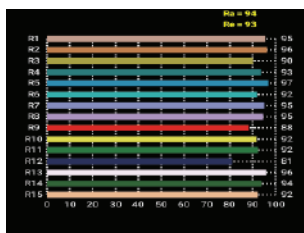

Daylight

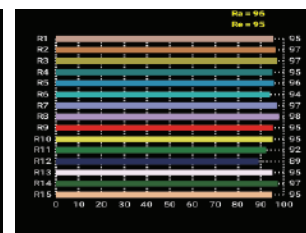

Tungsten

LED Spot 150 Bi-Color

SPECIFICATIONS

Identity No.	L0015BLS
Max. Capacity	150W
Voltage	95 - 260V AC
Frequency	50Hz / 60Hz
Current	1.6A - 0.6A
Fresnel Lens	Ø175mm
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Min. Distance to Illuminated Object	1 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	5.0 kg

ACCESSORIES

- Filter Frame
- Safety Cable (for lamphead)