




LED Profile 300 Zoom 25°-50°


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Filter Frame
- Set of 4 Cutters
- Power Cable

SPECTRUM

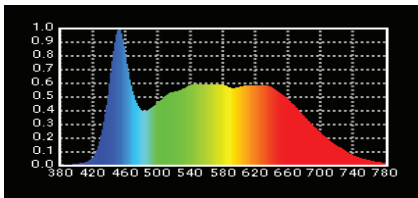


(5600K)

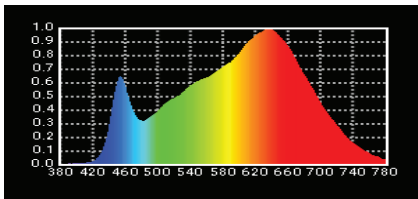


(3200K)

HISTOGRAM

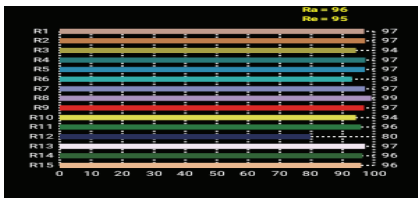

(5600K)

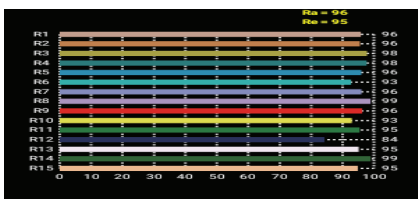

(3200K)

LED Profile 300 Zoom 25°-50°

SPECIFICATIONS

Identity No.	L30B2550LP
Max. Capacity	300W
Voltage	95 - 265V AC
Frequency	50Hz / 60Hz
Current	3.2A - 1.2A
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Beam Angle	25° -50°
Dimming	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	60°C
Max. Ambient Temp.	35°C
Operation Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	13.5 kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)

PHOTOMETRIC DATA

Color Temp	Beam Angle	Beam Diameter		
		5m	6m	7m
5600K	25°	Lux: 3206 Beam Ø: 2.22m	Lux: 2226 Beam Ø: 2.66m	Lux: 1688 Beam Ø: 3.10m
	50°	Lux: 1059 Beam Ø: 4.66m	Lux: 735 Beam Ø: 5.60m	Lux: 549 Beam Ø: 6.53m
3200K	25°	Lux: 2365 Beam Ø: 2.22m	Lux: 1642 Beam Ø: 2.66m	Lux: 1248 Beam Ø: 3.10m
	50°	Lux: 780 Beam Ø: 4.66m	Lux: 542 Beam Ø: 5.60m	Lux: 411 Beam Ø: 6.53m

DIMENSIONS (mm)

