





**PAB 300**  
26°

**LED Profile 300 (26°)**



■ **LAMPHEAD CONTENTS**

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- Power Cable

**SPECTRUM**

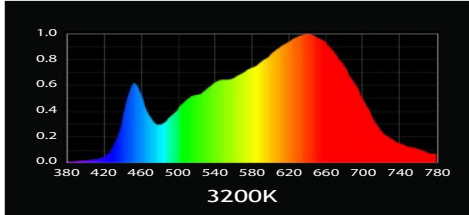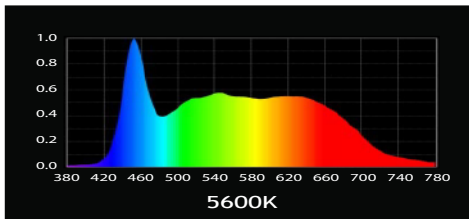

**HISTOGRAM**

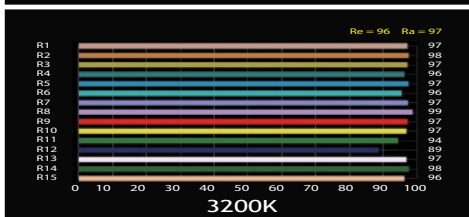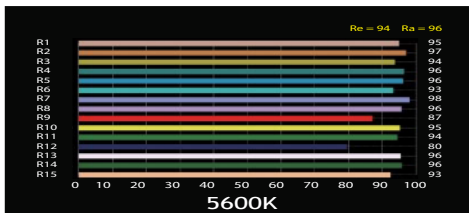

**LED Profile 300 (26°)**


■ **SPECIFICATIONS**

Identity No.	L300026PAB
Max. Capacity	300W
Voltage	95 - 260V AC 50Hz / 60Hz 22 - 36V DC
Current	1.4A @220V AC 12.5A @24V DC
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Beam Angle	26°
Dimming	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	35°C
Operation Range	+45° - 0° - -45°
Weight (with Barrel)	13.0 kg
Weight (Lamphead)	8.5 kg

■ **ACCESSORIES**

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)

■ **PHOTOMETRIC DATA**

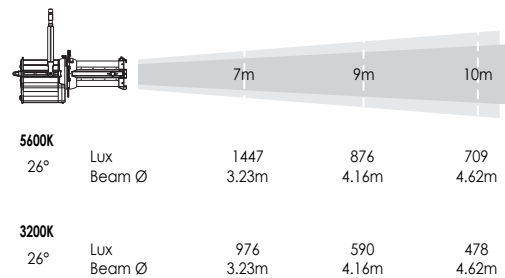

■ **DIMENSIONS (mm)**

