



**PAB 300**  
19°

**LED Profile 300 (19°)**

■ **LAMPHEAD CONTENTS**

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- Power Cable

**LED Profile 300 (19°)**


■ **SPECIFICATIONS**

Identity No.	L300019PAB
Max. Capacity	300W
Voltage	95 - 260V AC 50Hz / 60Hz 22 - 36V DC
Current	1.4A @220V AC 12.5A @24V DC
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Beam Angle	19°
Dimming	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	35°C
Operation Range	+45° - 0° - -45°
Weight (with Barrel)	13.5 kg
Weight (Lamphead)	8.5 kg

■ **ACCESSORIES**


- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)

■ **PHOTOMETRIC DATA**





<b>5600K</b>				
19°	Lux	2923	1768	1432
	Beam Ø	2.34m	3.01m	3.35m
<b>3200K</b>				
19°	Lux	1996	1207	978
	Beam Ø	2.34m	3.01m	3.35m

■ **DIMENSIONS (mm)**

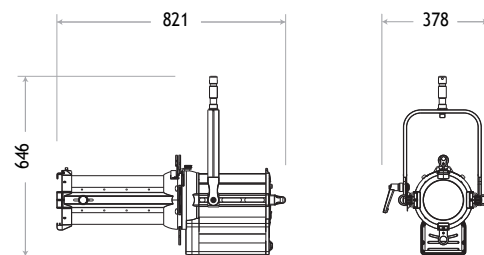

**SPECTRUM**

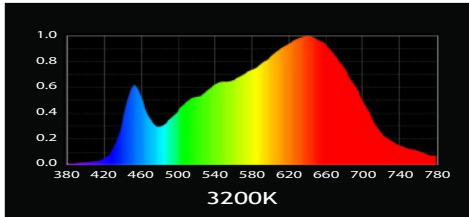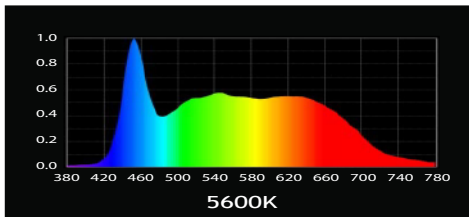

**HISTOGRAM**

