


LED Soft Panel 100 (Yoke Mount)

LAMPHEAD CONTENTS

- Lamp Housing with DMX
- M.O. / P.O. Stirrup *
with Ø28mm (1-1/8 in.) Spigot
- Power Cable with Connector
- AC / DC Input

* M.O. = Manual Operated
P.O. = Pole Operated

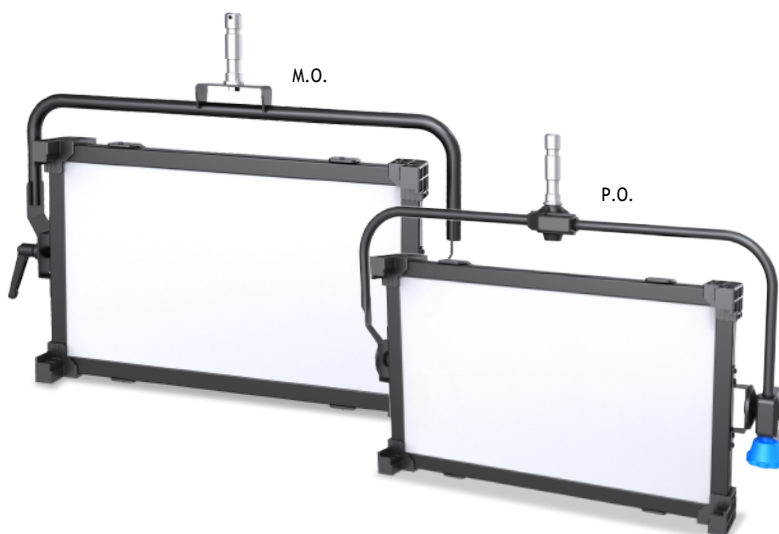

LED Soft Panel 100 (Yoke Mount)

SPECIFICATIONS

Identity No.	L001SLSP (M.O.) LP01SLSP (P.O.)
Max. Capacity	100W
Voltage	95 - 265V AC 22 - 36V DC
Frequency	50Hz / 60Hz
Current	0.5A @ 220V 50Hz AC 1A @ 110V 60Hz AC 3.5A @ 30V DC
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
M.O. / P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	70 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight	10.0 kg (M.O.) 12.0 kg (P.O.)

ACCESSORIES


4-leaf Barndoor

Filter Frame


Eggcrate

Safety Cable (for lamphead)

DIMENSIONS (mm)

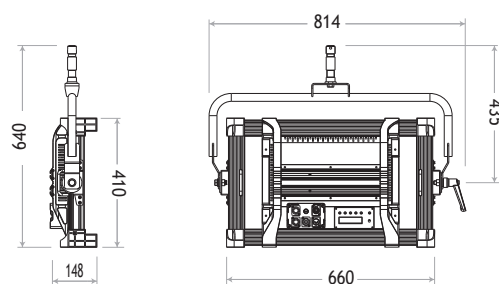


M.O.


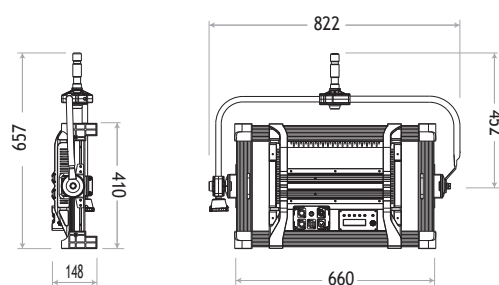


P.O.


CONTROL PANEL

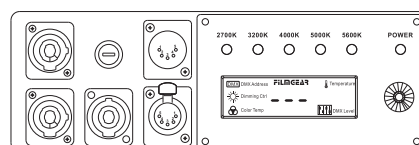

■ PHOTOMETRIC DATA

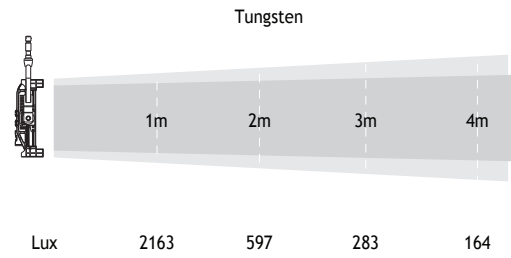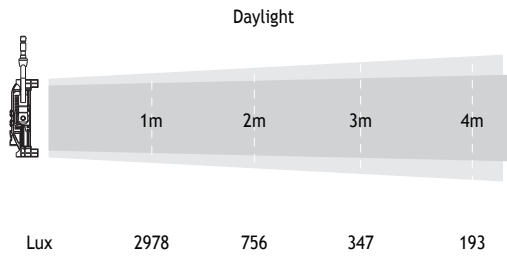

■ SPECTRUM

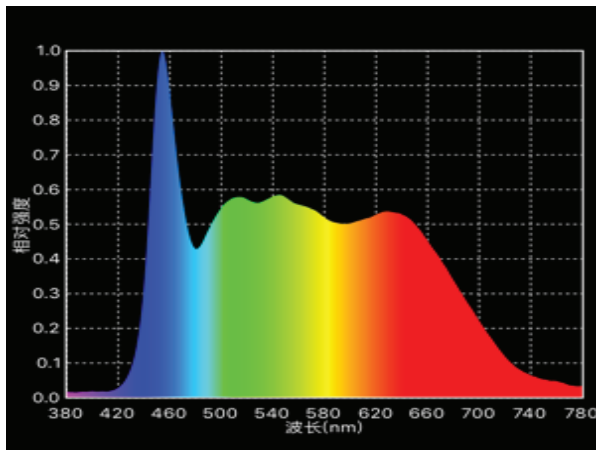

■ HISTOGRAM

