




Tungsten Fresnel 150W Junior

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø50mm (2 in.) Fresnel Lens
- In-Line Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

DIMENSIONS (mm)

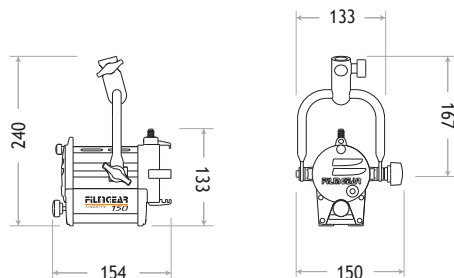

Tungsten Fresnel 150W Junior

SPECIFICATIONS

Identity No.	L00150TJ
Capacity	150W
Voltage	100 - 250V AC
Fresnel Lens	Ø50mm (2 in.)
Lamp Type	150W SE
Color Temp.	3200K
Lamp Holder	GX6.35
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	0.5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	1.4 kg
Weight (with barndoor)	1.5 kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø76mm (3 in.) :

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Variable Snoot

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

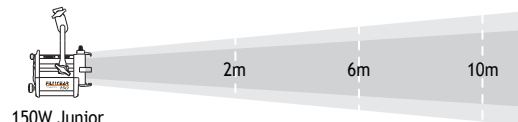

150W Junior

Spot (13°)

Lux	1511	168	60
Beam Ø	0.46 m	1.37 m	2.28 m

Flood (44°)

Lux	500	56	20
Beam Ø	1.62 m	4.85 m	8.08 m